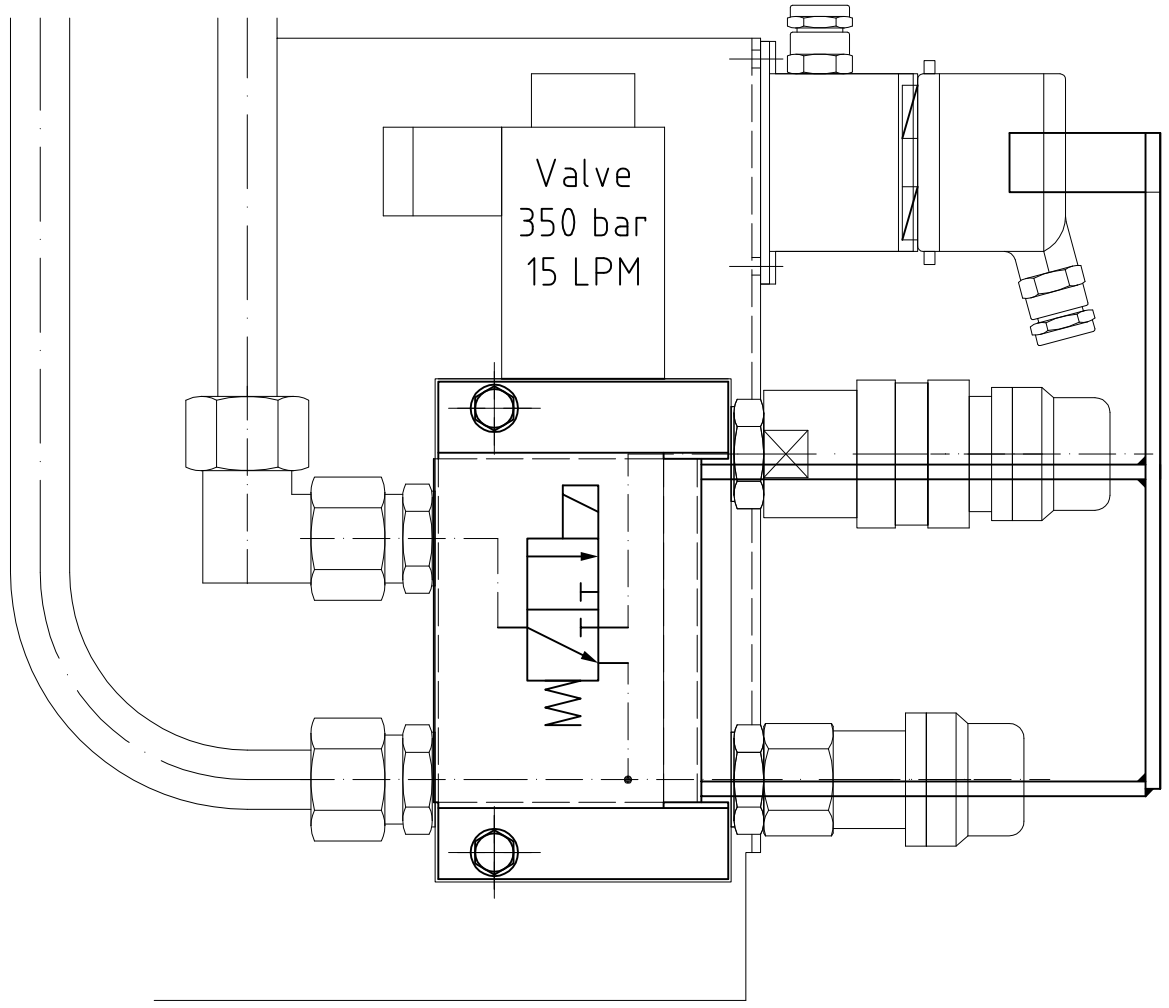



Stekker met opgebouwde
drukknop

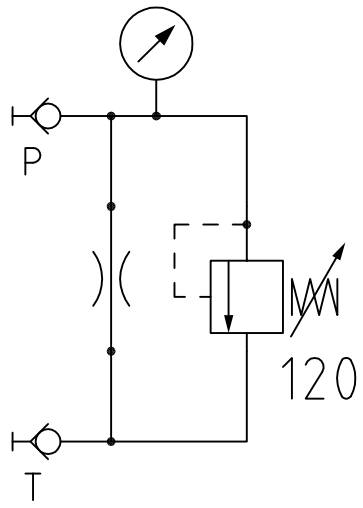

Slang met tussen gebouwde
overdrukventiel + manometer + smoring

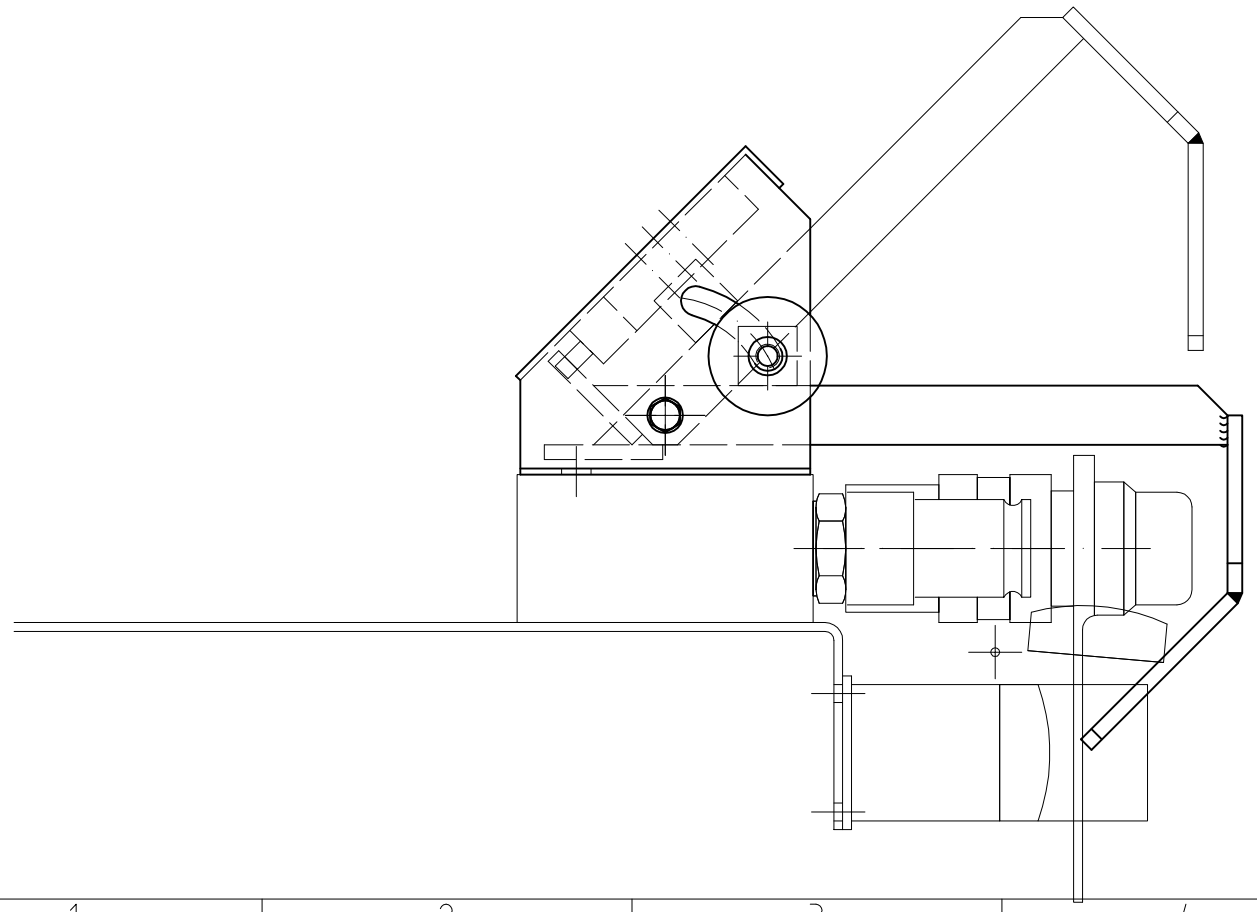

Controle van het hoofdventiel tijdens jaarlijkse controle van het haakarmsysteem.

Pers en retour aansluiten op testset bestaande uit een overdrukveiligheid,
afgesteld op 120bar, met parallel daaraan een smoring.
Het hoofdventiel aansturen m.b.v. een stekker met opgebouwde drukknop.
Bij loslaten van de drukknop dient de hydraulische druk ogenblikkelijk
en zonder vertraging af te vallen.
Indien de hydraulische druk vertraagd afvalt dan dient de oorzaak hiervan
te worden opgespoord en verholpen.

HYTRANS FIRE SYSTEM
HYTRANS TRAFFIC SYSTEM
Hytrans Systems b.v. shall not be liable for any errors that may appear in this document or for incidental or consequential damages in connection with the performance or use of the indicated material.
Copyright Hytrans Systems b.v.
Information on this paper is subject to change without notice.

Pro.	Changes	Date	Name
H			
G			
F			
E			
D			
C			
B			
A			

Tolerances acc.: NEN-ISO 2768-1 / 2 m (middle)

Papersize A3

	Date	Name
Drawn	31-3-2009	NvdM
Issued		
Norm	–	

DOS DWG-file 7500569.DWG

Scale 1:2.5 | Position – | Quantity –

HOSE RECOVERY UNIT

AFZETBEVEILIGING BZK TESTVOORZIENING

750-0569

Page –

LEMMER THE NETHERLANDS tel. (+31) 514-562415 fax. -562428